

# Fieldbus System (For Input/Output)


## EX245 Series

■ **AIDA<sup>\*1</sup> specifications compliant**


■ **Push Pull connectors**

- One-touch installation and removal
- Reduced wiring time

Push Pull connectors

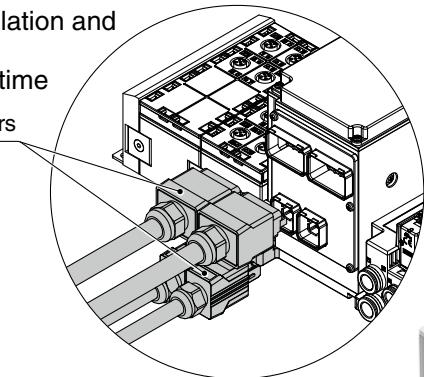

Digital input modules  
Digital output module

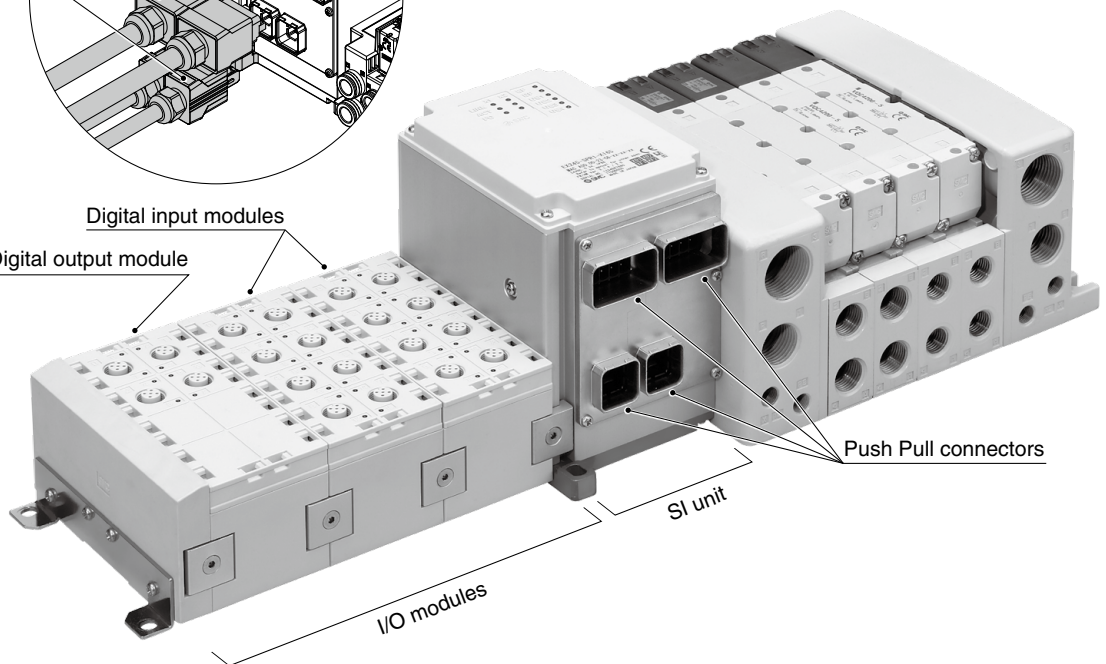

Push Pull connectors

SI unit

I/O modules



IP65

Type 1	EX260
Type 2	EX500
Type 3	EX600
	EX245
	EX250
Type 1	EX120/121/122
Type 1	EX140
	EX180
Type 2	EX510
	M8/M12
	ATEX

\*1 Abbreviation of the Automation Initiative of German (Deutschland) Automobile Manufacturers

■ **Compatible Protocols**



Made to Order



- SCRJ connector
- RJ45 connector

■ **Modules can be combined flexibly.**


- Number of valves, digital inputs/outputs

Solenoid valve	Max. 32 valves
Digital input	Max. 128 inputs
Digital output	Max. 64 outputs


- I/O modules can be connected and removed one by one.
- Up to 8 modules can be connected in any order.

### Manifold Solenoid Valves


SY3000/5000/7000



VQC1000/2000/4000/5000

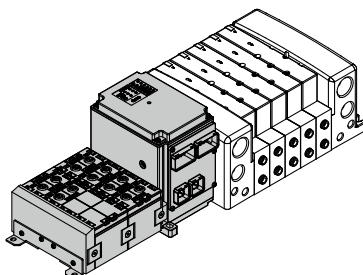

SV1000/2000/3000




\* These products should be ordered separately.

# EX245 Series

## Dual communication and dual power connectors

Dual communication connectors allow daisy chain or ring topology for Media Redundancy Protocol (MRP). Dual power connectors allow for daisy chain connections avoiding branch or splitter adapters, saving cost and reducing wiring.

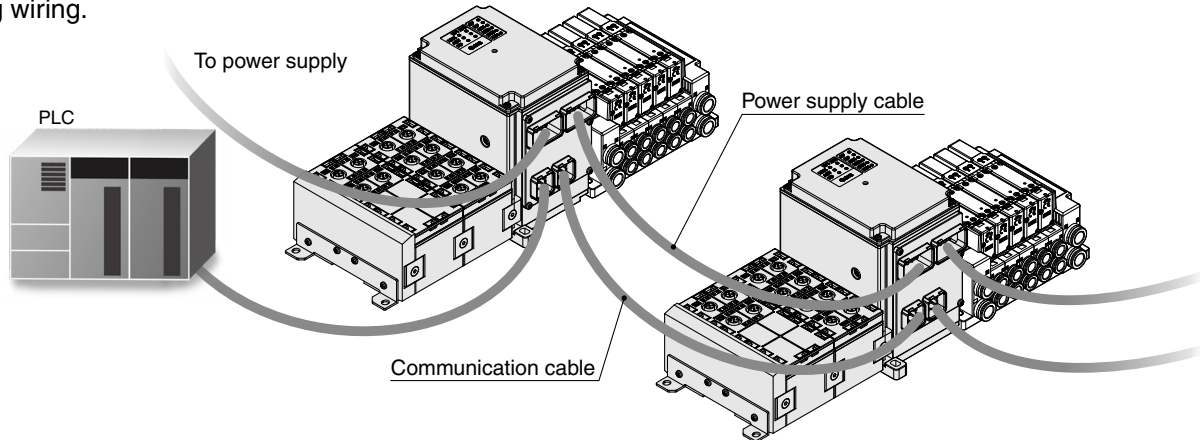


### An external branch connector is not necessary. Reduced wiring space

Easy to use one touch AIDA Push Pull connectors (compliant with AIDA specifications) saves time when installing and maintaining.

## Fiber-optic cable maintenance alarm <sup>\*1</sup>

\*1 Only available to the EX245-SPN1

This feature continuously monitors the received light intensity from the fiber-optic cable and reports it to the PLC. Any loss of intensity is an indicator of damage to the cable so may give a warning before communication is lost. This allows preventative maintenance and so avoids unplanned shutdowns.

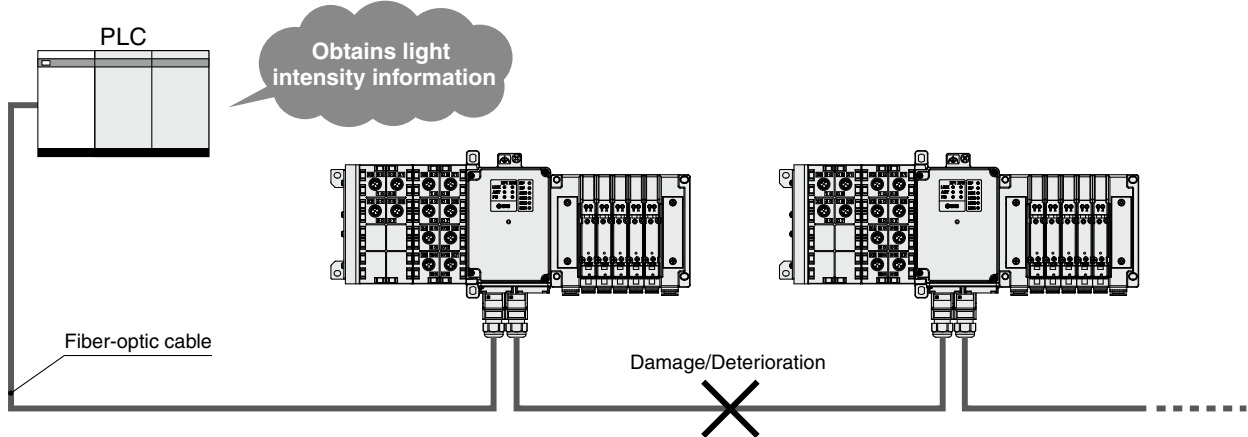


## MRP function (Ring wiring)

MRP (Media Redundancy Protocol) function:

Even if a communication cable is disconnected or damaged at any location, **communication can be continued. The cable segment that is causing the problem is identified** allowing quick and easy replacement.

To use the MRP function, the PLC should be able to support the MRP function.

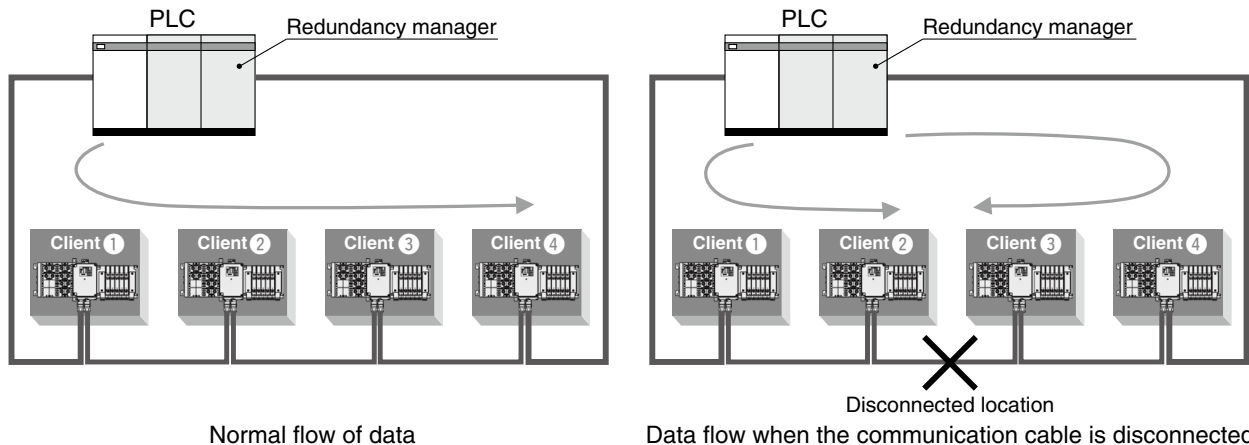

Normal flow of data

Data flow when the communication cable is disconnected

## Fast Start Up function


For the Fast Start Up function, time from power ON to communication connection  
**Approx. 10 sec.**



**Approx. 0.5 sec.**

In the case of a tool changer, it takes about 10 seconds for communication to be connected in some products after the power to the device installed on the tool is turned ON. For products which support the Fast Start Up function, communication can be operational even faster.


\* To use the Fast Start Up function, the PLC should be able to support the Fast Start Up function.

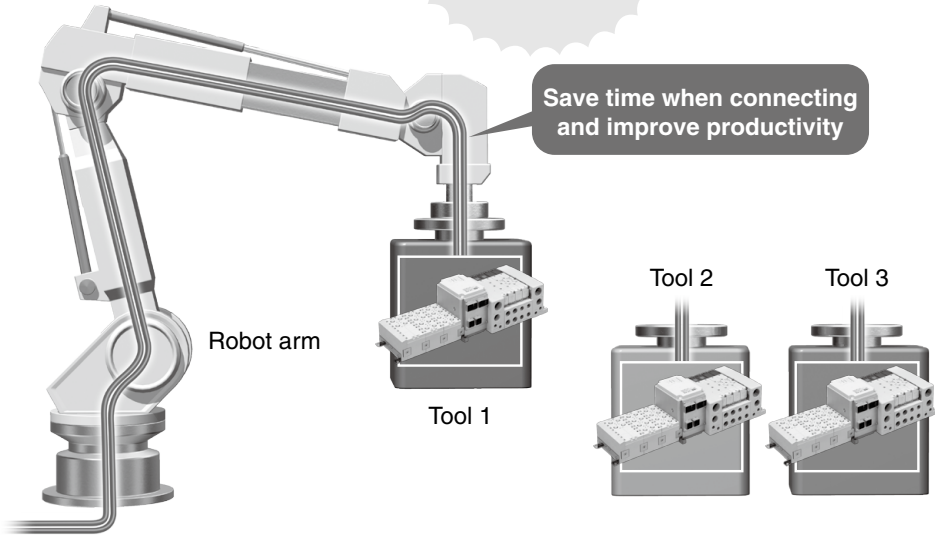

Type 1	EX260
	EX123/124/126
Type 2	EX500
	EX600
Type 3	EX245
	EX250
Type 1	EX140
	EX180
Type 2	EX510
	M8/M12
	ATEX

# CONTENTS

**Type 3** Integrated input-output type  
 Fieldbus System (For Input/Output)  
**EX245 Series**

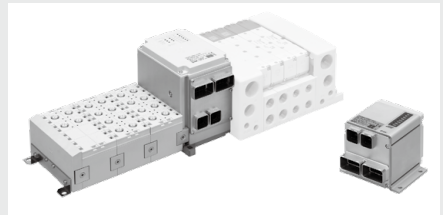

Construction ..... p. 137  
 How to Order ..... p. 137  
 Specifications ..... p. 138  
 Dimensions/Parts Description ..... p. 139  
 Assembly Examples ..... p. 140

**Made to Order**

**EX245-X171/X172/X35** ..... p. 141

How to Order ..... p. 141  
 Specifications ..... p. 141  
 Dimensions ..... p. 142  
 Parts Description ..... p. 143  
 LED Indicator ..... p. 144


Specific Product Precautions ..... p. 145

# Fieldbus System For Input/Output **EX245 Series**



The PROFINET compatible SI unit is to be discontinued as of October 2023. A substitute product is available, but they are not completely interchangeable, so contact your local SMC sales representative for details.

## Construction

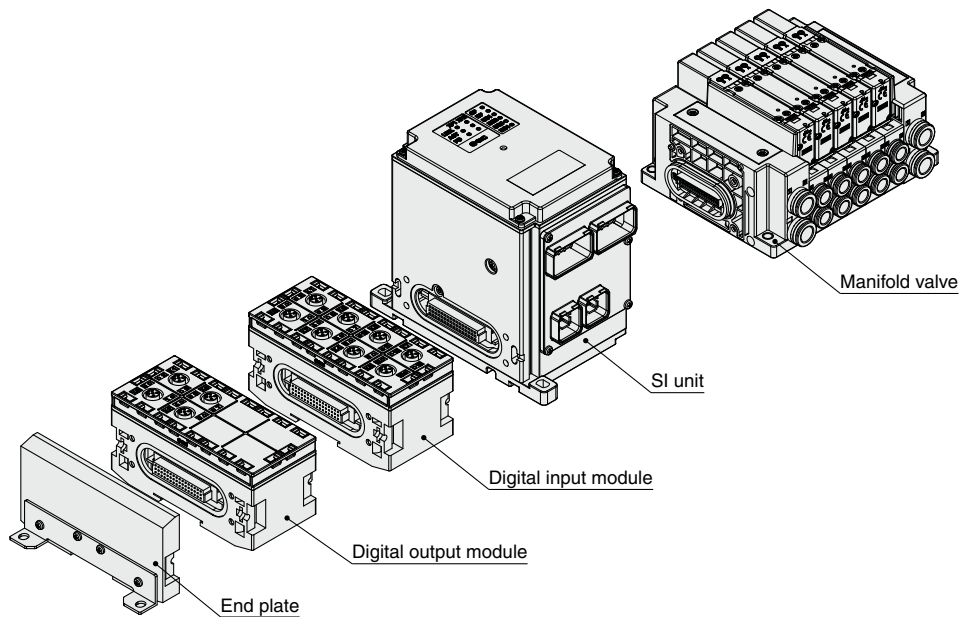

## How to Order

### SI Unit

## EX245-SPN1

#### SI unit specification


Model	Protocol	Max. number of modules	Max. number of digital inputs	Max. number of digital outputs	Communication connector	Power connector
SPN1	PROFINET	8	128	64	Push Pull connector (SCRJ): 2 pcs.	Push Pull connector (24 V): 2 pcs.
SPN2					Push Pull connector (RJ45): 2 pcs.	Push Pull connector (24 V): 2 pcs.



Made to Order  
→ p. 141

### Digital Input Module

## EX245-DX1




#### Digital input module specification

DX1	Digital input (16 inputs)
-----	---------------------------

### End Plate

## EX245-EA2-1




#### Bracket

1	With bracket
2	Without bracket

### Digital Output Module

## EX245-DY1



#### Digital output module specification

DY1	Digital output (8 outputs)
-----	----------------------------

\* Please contact SMC for manifold valve part numbers.




## Specifications

### Common Specifications for All Units/Modules

Item	Specifications
<b>Operating temperature range</b>	Operating: -10 to 50°C, Stored: -20 to 60°C (No condensation)
<b>Operating humidity range</b>	Operating, Stored: 35 to 85%RH (No condensation)
<b>Withstand voltage</b>	500 VAC for 1 minute between external terminals and FE
<b>Insulation resistance</b>	500 VDC, 10 MΩ or more between external terminals and FE
<b>Enclosure</b>	IP65 (Manifold assembly, With seal cap)
<b>Standards</b>	CE marking (EMC directive/RoHS directive)

### SI Unit Specifications



EX245-SPN1/SPN2


The PROFINET compatible SI unit is to be discontinued as of October 2023. Consider replacing it with the substitute product.

Discontinued model no.	Substitute product
EX245-SPN1	▶ EX245-SPN1A
EX245-SPN2	▶ EX245-SPN2A

Model		EX245-SPN1	EX245-SPN2
<b>Communication</b>	<b>Protocol</b>	PROFINET	
	<b>Device type</b>	PROFINET IO	
	<b>Communication speed</b>	100 Mbps full duplex	
	<b>Configuration file</b> <sup>*1</sup>	GSD file	
	<b>Applicable function</b>	MRP Fast Start Up Fiber-optic cable maintenance alarm	
<b>Electrical</b>	<b>Internal current consumption (US1)</b>	300 mA or less	250 mA or less
	<b>Loop through current between power connector</b>	10 A	
	<b>Operating voltage/ US1</b>	24 VDC +20%, -15%/6 A	
	<b>Max. current US2</b>	24 VDC +20%, -15%/4 A	
<b>Output</b>	<b>Output type</b>	Source/PNP (Negative common)	
	<b>Number of outputs</b>	32 outputs	
	<b>Load</b>	Solenoid valve with surge voltage suppressor of 24 VDC, 1 W or less (SMC)	
	<b>Power supply</b>	24 VDC, 2 A	
	<b>Fail safe</b>	HOLD/CLEAR/Forced power ON	
<b>General</b>	<b>Protection</b>	Short-circuit protection	
	<b>Max. number of modules</b>	8	
	<b>Max. number of digital inputs</b>	128	
	<b>Max. number of digital outputs</b>	64	
<b>Weight</b>	1000 g		

\*1 The setting file can be downloaded from the SMC website, <https://www.smcworld.com>

### Digital Input Module




EX245-DX1

Model		EX245-DX1
<b>Input</b>	<b>Input type</b>	PNP
	<b>Input connector</b>	M12 (5-pin) socket <sup>*1</sup>
	<b>Number of inputs</b>	16 inputs
	<b>Supplied voltage</b>	24 VDC
	<b>Max. supplied current</b>	0.5 A/Connector, 2 A/Module
	<b>Protection</b>	Short-circuit protection
	<b>Input current (at 24 VDC)</b>	Typ. 4.5 mA
	<b>ON voltage</b>	11 to 30 V
	<b>OFF voltage</b>	-3 to 5 V
<b>Internal current consumption</b>	50 mA or less	
<b>Weight</b>	280 g	

\*1 An M12 (4-pin) connector can also be connected.

### Digital Output Module




EX245-DY1

Model		EX245-DY1
<b>Output</b>	<b>Output type</b>	PNP
	<b>Output connector</b>	M12 (5-pin) socket <sup>*1</sup>
	<b>Number of outputs</b>	8 outputs
	<b>Supplied voltage</b>	24 VDC
	<b>Max. load current</b>	0.5 A/Output, 2 A/Module
	<b>Protection</b>	Short-circuit protection
<b>Current consumption</b>	50 mA or less	
<b>Weight</b>	280 g	

\*1 An M12 (4-pin) connector can also be connected.

### End Plate



EX245-EA2-□

Model	EX245-EA2-1	EX245-EA2-2
<b>Bracket</b>	Yes	No
<b>Weight</b>	200 g	150 g


Type 1  
EX260  
EX123/124/126  
Type 2  
EX500  
EX600  
EX245  
Type 3  
EX250  
EX120/121/122  
EX140  
EX180  
EX510  
M8/M12  
ATEX

# EX245 Series

## Dimensions/Parts Description


### SI Unit

#### EX245-SPN1

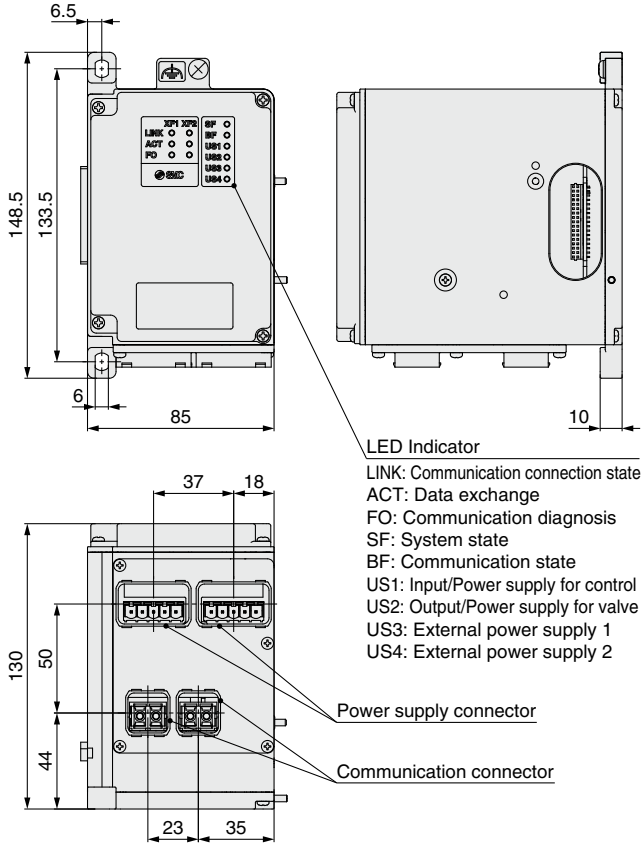


### End Plate

#### EX245-EA2-1

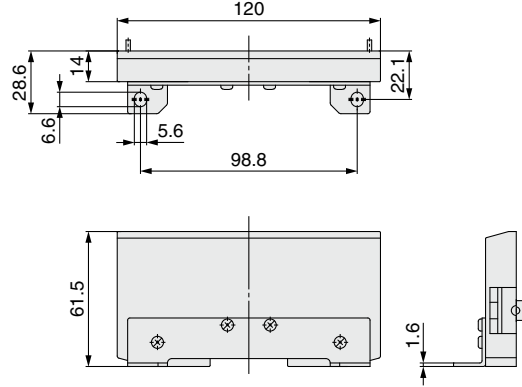


#### EX245-EA2-2

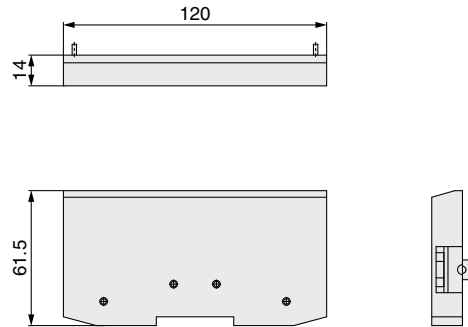


### Digital Input Module

#### EX245-DX1

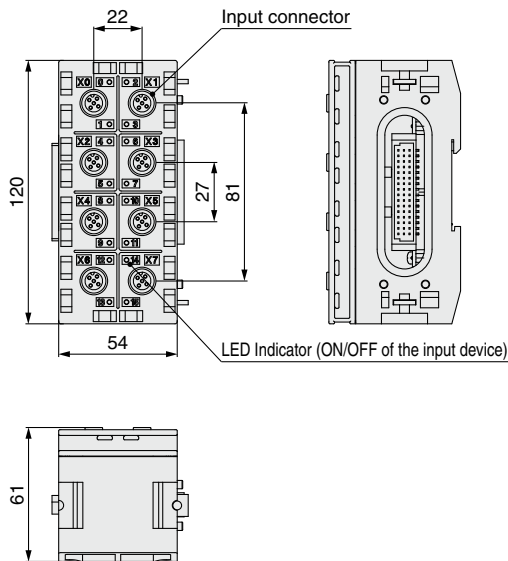

### Digital Output Module


#### EX245-DY1

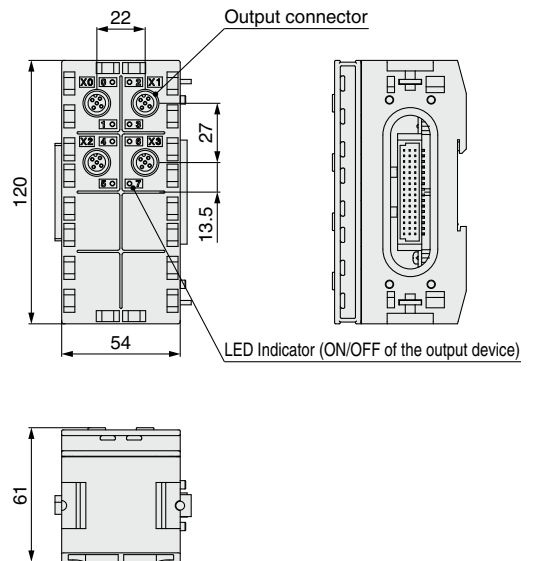

## Assembly Examples

Manifold valve ————— Please contact SMC for order numbers.  
 SI unit ————— EX245-SPN1  
 Digital module (Input) ——— EX245-DX1  
 Digital module (Output) ——— EX245-DY1  
 End plate ————— EX245-EA2-1

The modules and manifold valve are not assembled at the time of shipment.  
 After assembling the SI unit and manifold valve, assemble the modules.

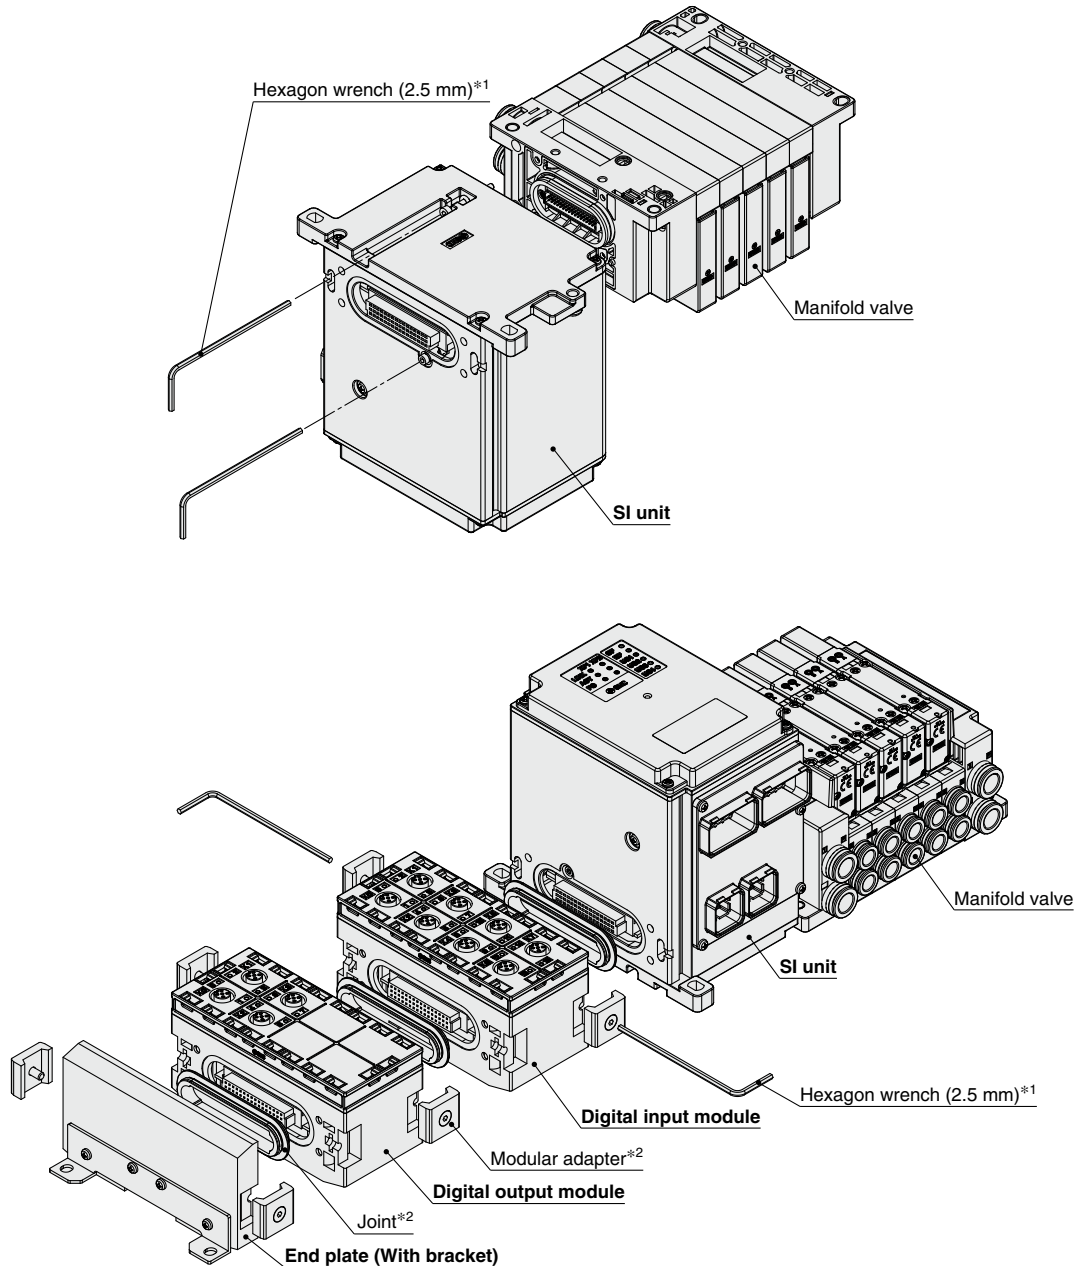

\*1 Hexagon wrench is not included. It should be provided by the customer.

\*2 Joint and modular adapter are shipped together with the product.

Type 1	EX260
	EX123/124/126
Type 2	EX500
	EX600
Type 3	EX245
	EX250
Type 1	EX120/121/122
	EX140
	EX180
Type 2	EX510
	M8/M12
	ATEX

# Made to Order

## Fieldbus System

# EX245-X171/X172/X35

Please contact SMC for detailed specifications and lead times.  
Prepare the SI unit, each type of module, and the manifold valve (without SI unit) separately, and combine them before use.

### How to Order

### SI Unit/Repeater

## EX245 - SPR1-X171

#### SI unit specification

Model	Protocol	Max. number of modules	Max. number of digital inputs	Max. number of digital outputs	Communication connector	Power supply connector
SPR1-X171	PROFINET	8	128	64	M12 connector: 2 pcs.	7/8 connector: 1 pc.
SPR1-X172	PROFINET	8	128	64	Push Pull connector (RJ45): 2 pcs.	Push Pull connector (24 V): 2 pcs.
SIB1-X35	INTERBUS	8	128	64	Rugged Line connector: 2 pcs.	

#### Repeater specification

RPN1-A-X51	PROFINET	0	0	0	Push Pull connector (SCRJ): 2 pcs.	Push Pull connector (24 V): 2 pcs.
------------	----------	---	---	---	------------------------------------	------------------------------------

### Specifications


#### Common Specifications for All Units/Modules

Item	Specifications
Operating temperature range	Operating: -10 to 50°C, Stored: -20 to 60°C (No condensation)
Operating humidity range	Operating, Stored: 35 to 85%RH (No condensation)
Withstand voltage	500 VAC for 1 minute between external terminals and FE
Insulation resistance	500 VDC, 10 MΩ or more between external terminals and FE
Enclosure	IP65 (Manifold assembly, With seal cap)
Standards	CE marking, RoHS compliant

#### SI Unit Specifications

Model		EX245-SPR1-X171	EX245-SPR1-X172	EX245-SIB1-X35
Communication	Protocol	PROFINET		INTERBUS
	Device type	PROFINET IO		Remote bus device
	Communication speed	100 Mbps full duplex		500 kbps, 2 Mbps
	Configuration file*1	GSD file		XML file, Database file
	Applicable function	MRP, Fast Start Up		—
	Terminating resistor	—		—
Electrical	Internal current consumption (US1)	250 mA	250 mA	200 mA
	Loop through current between power connector	—	10 A	10 A
	Operating voltage/Max. current	24 VDC +20%, -15%/6 A		24 VDC ±10%/6 A
		24 VDC +20%, -15%/4 A		24 VDC +10%, -5%/4 A
Output	Output type	PNP (Negative common)		
	Number of outputs	32 outputs		
	Load	Solenoid valve with surge voltage suppressor of 24 VDC, 1 W or less (SMC)		
	Power supply	24 VDC, 2 A		
	Fail safe	HOLD/CLEAR/Forced power ON		
	Protection	Short-circuit protection		
General	Max. number of modules	8		8
	Max. number of digital inputs	128		128
	Max. number of digital outputs	64		64
	Max. number of analog inputs	8		—
	Weight	1000 g		1200 g

\*1 Please contact SMC for the setting file.



EX245-RPN1-A-X51


#### Repeater

Model		EX245-RPN1-A-X51	
Communication	Protocol	PROFINET	
	Device type	PROFINET IO	
	Communication speed	100 Mbps full duplex	
	Configuration file	GSD file	
	Applicable function	Fiber-optic cable maintenance alarm, MRP, Fast Start Up	
Electrical	Internal current consumption	250 mA	
	Loop through current between power connector	16 A	
	Operating voltage	US1	24 VDC +20%, -15%
		US2	24 VDC +20%, -15%
Weight	500 g		


**Dimensions**

**SI Unit**


**EX245-SPR1-X171**

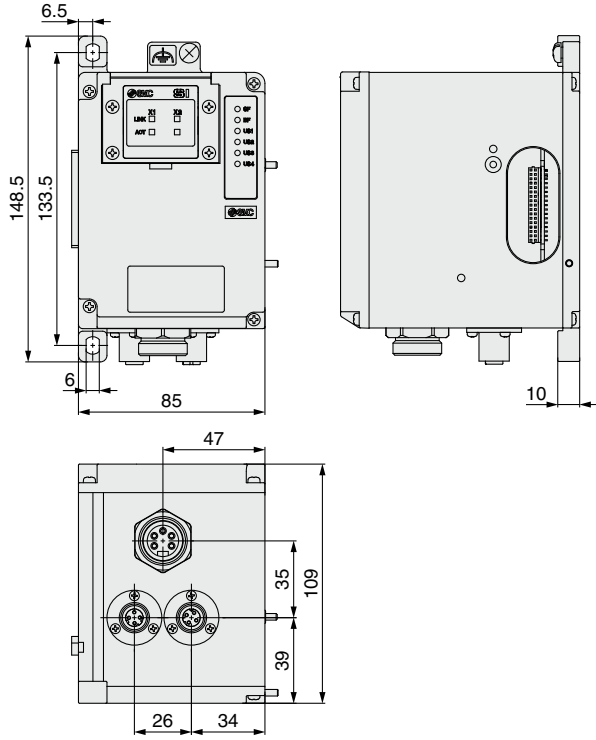

**EX245-SPR1-X172**

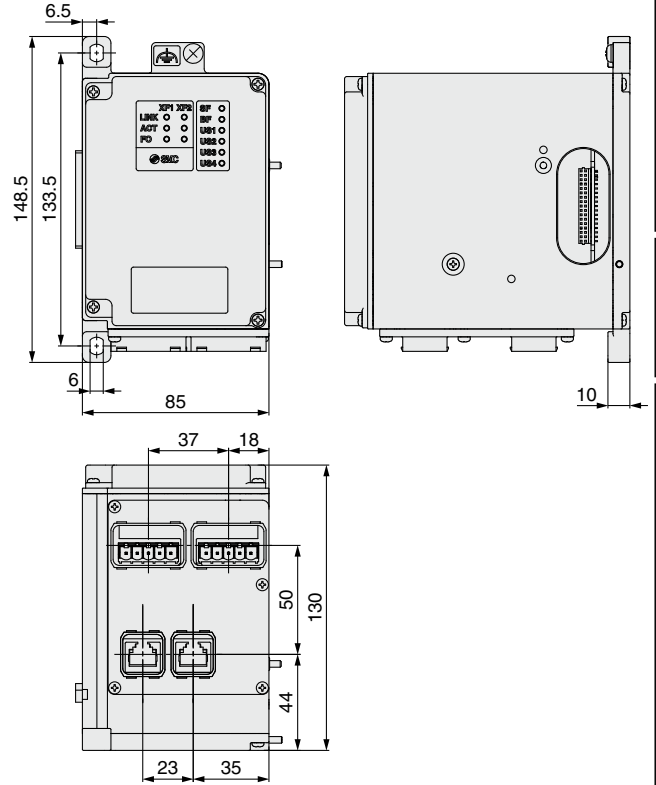


**EX245-SIB1-X35**

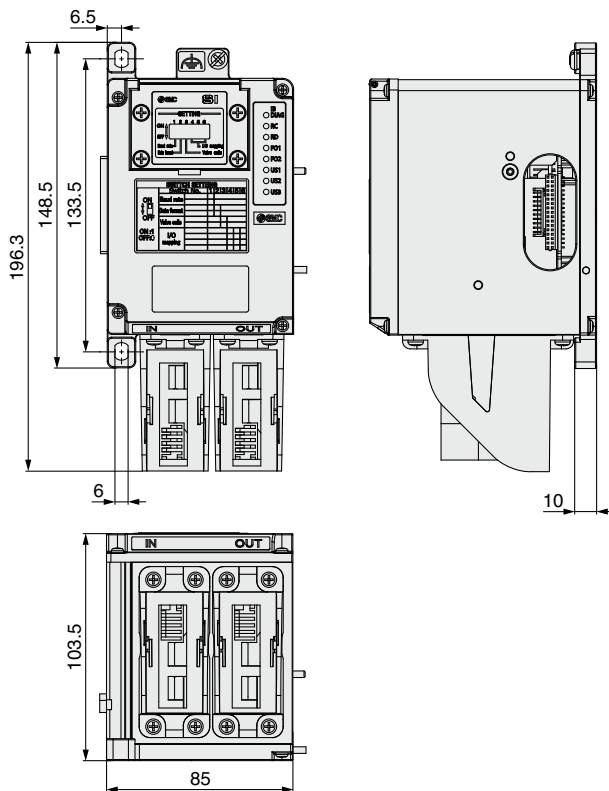

**Repeater**

**EX245-RPN1-A-X51**

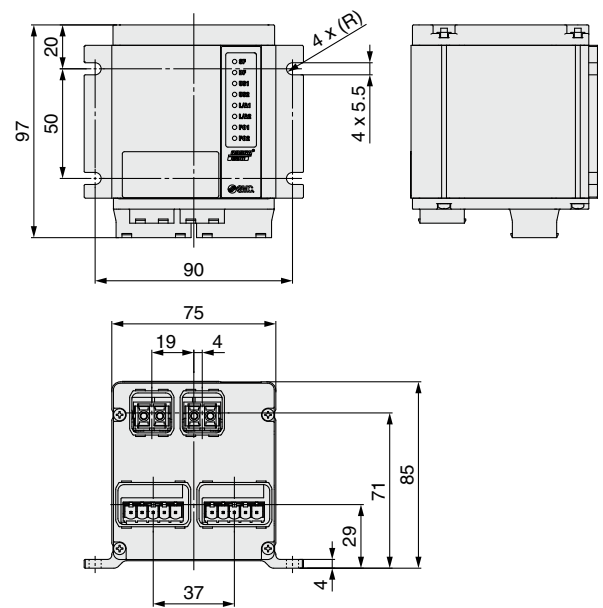

Type 1	EX260
Type 2	EX123/124/126
Type 3	EX500
	EX600
	<b>EX245</b>
	EX250
Type 1	EX120/121/122
	EX140
	EX180
Type 2	EX510
	M8/M12
	ATEX




# EX245 Series


## Parts Description

### SI Unit


#### EX245-SPR1-X171

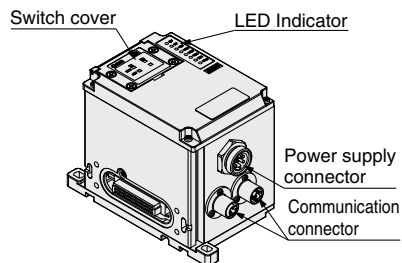

#### EX245-SPR1-X172




#### EX245-SIB1-X35

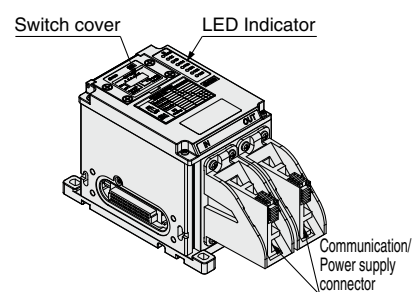

### Repeater


#### EX245-RPN1-A-X51




**LED Indicator**

**SI Unit**


**EX245-SPR1-X171**

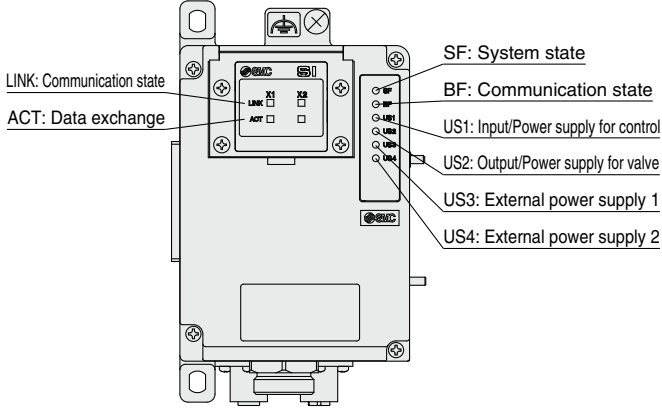

**EX245-SPR1-X172**

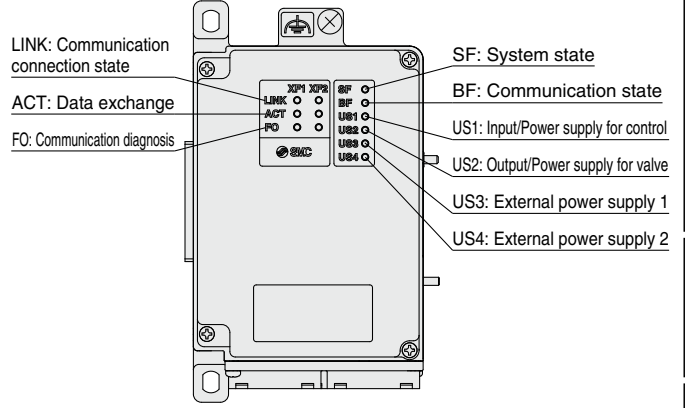


**EX245-SIB1-X35**

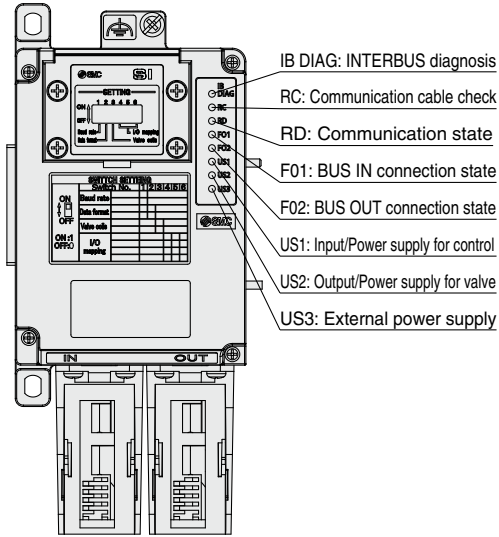

**Repeater**

**EX245-RPN1-A-X51**

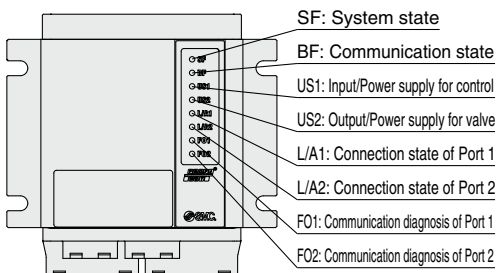

Type 1	EX260
Type 1	EX123/124/126
Type 2	EX500
Type 2	EX600
Type 3	EX245
Type 3	EX250
Type 1	EX120/121/122
Type 1	EX140
Type 1	EX180
Type 2	EX510
Type 2	M8/M12
Type 2	ATEX



## EX245 Series

# Specific Product Precautions

Be sure to read this before handling the products. Refer to page 277 for safety instructions. For fieldbus system precautions, refer to pages 278 to 280 and the “Operation Manual” on the SMC website: <http://www.smcworld.com>

### Operating Environment

#### **Caution**

**1. Select the proper type of enclosure according to the operating environment.**

IP65 is achieved when the following conditions are met.

- 1) Provide appropriate wiring of the electrical wiring cables, communication connectors, and cables with M12 connectors.
- 2) Suitable mounting of the SI unit, each module, and the manifold valve
- 3) Be sure to mount a seal cap on any unused connectors.

If using in an environment where it may be exposed to water splash, please take measures such as using a cover.